



TRAIL TYPES AND SURFACES

- 3.1 INTRODUCTION
- 3.2 TYPICAL TRAIL CROSS-SECTIONS

TRAIL TYPES & SURFACES

3.1 INTRODUCTION

The Trail Types Matrix in Section 2 (Table 2.3) provides a breakdown of the different lengths and types of surfaces associated with each alternative. This section will provide the typical design detail that was used as a basis to develop cost projections.

Five preferred trail types and surfaces were used for the feasibility study and include asphalt, crushed limestone, helical pier supported boardwalk and clear-span bridge. Retaining wall was also included and reflected a similar cross-sectional design used along the existing East Boardman Lake Trail.

3.2 TYPICAL TRAIL CROSS-SECTIONS

Asphalt Trail


The proposed cross-section design for asphalt trail would be 10 feet wide. The 2" depth of Hot Mixed Asphalt (HMA) would be constructed on a 6" base of compacted aggregate. It is recommended that a 1 foot minimum aggregate base shoulder be constructed to increase on longevity of the trail shoulder and decrease maintenance. It is also recommended that a root barrier product be used underneath and on the sides of the trail in areas where there is significant tree cover.

When developing the estimate of cost for linear foot of asphalt trail the following scope items were considered: mobilization, removals, earthwork, all materials included in Typical Trailway Cross-Section, and restoration.


Crushed Limestone Trail

Crushed Limestone Trail was considered only in areas that were environmental or ecologically sensitive, although limestone trail could be used as an alternative to asphalt trail sections. The proposed cross-section for crushed limestone trail would be 10 feet wide. A 6" depth of specified crushed limestone would be compacted in place to provide an accessible surface.

When developing the estimate of cost for linear foot of crushed limestone trail the following scope items were considered: mobilization, removals, earthwork, all materials included in Typical Trailway Cross-Section, and restoration.

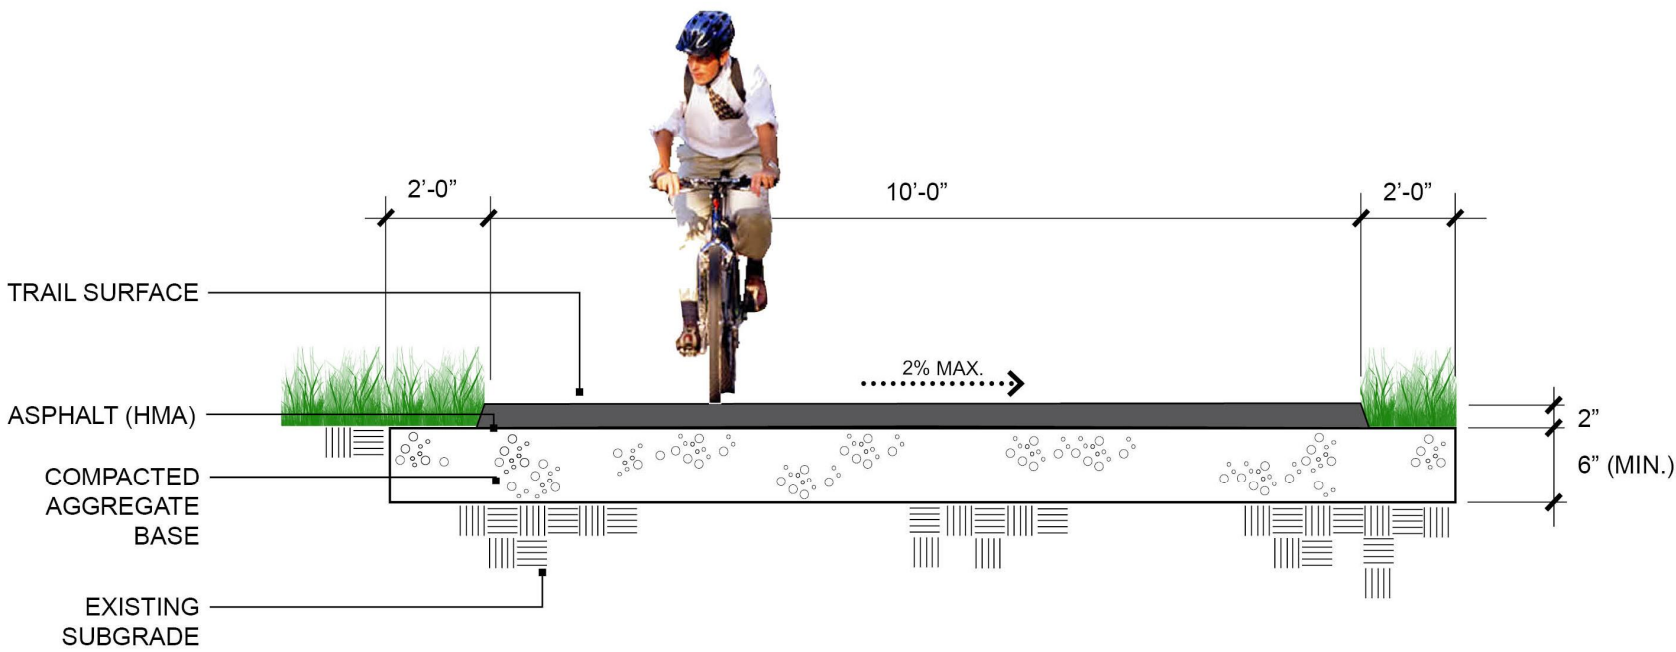

ASPHALT TRAILWAY
TYPICAL TRAILWAY CROSS-SECTION
NOT TO SCALE

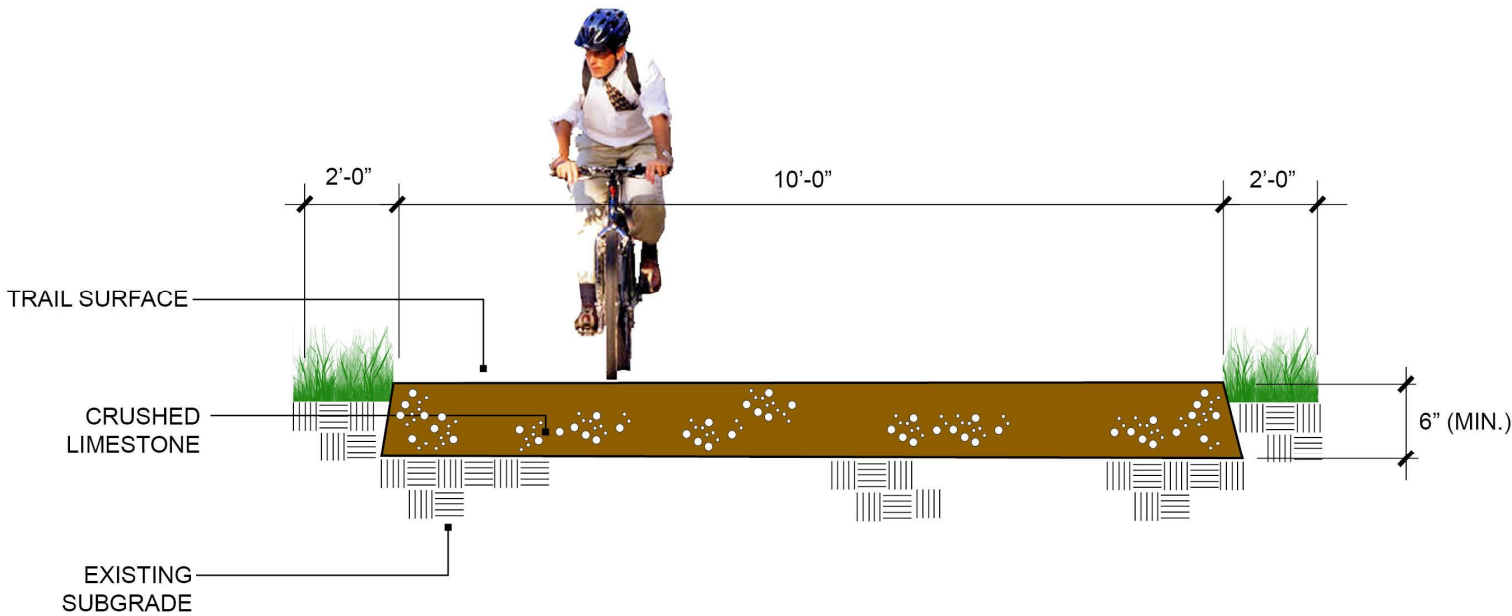


CRUSHED LIMESTONE
TYPICAL TRAILWAY CROSS-SECTION
NOT TO SCALE

TRAIL TYPES & SURFACES

TYPICAL TRAIL CROSS-SECTIONS (Continued)

Helical Pier Supported Boardwalk (HPSB)
The proposed cross-section design for a helical pier supported boardwalk would be 10 feet wide. The typical cross-section design includes railings, decking, and structural members. It is anticipated that any new boardwalk sections in the Boardman Lake vicinity will be constructed similar to the existing sections along the east side of Boardman Lake.

When developing the estimate of cost for linear foot of helical pier supported boardwalk the following scope items were considered: mobilization, removals, earthwork, all materials included in Typical Trailway Cross-Section, and restoration.

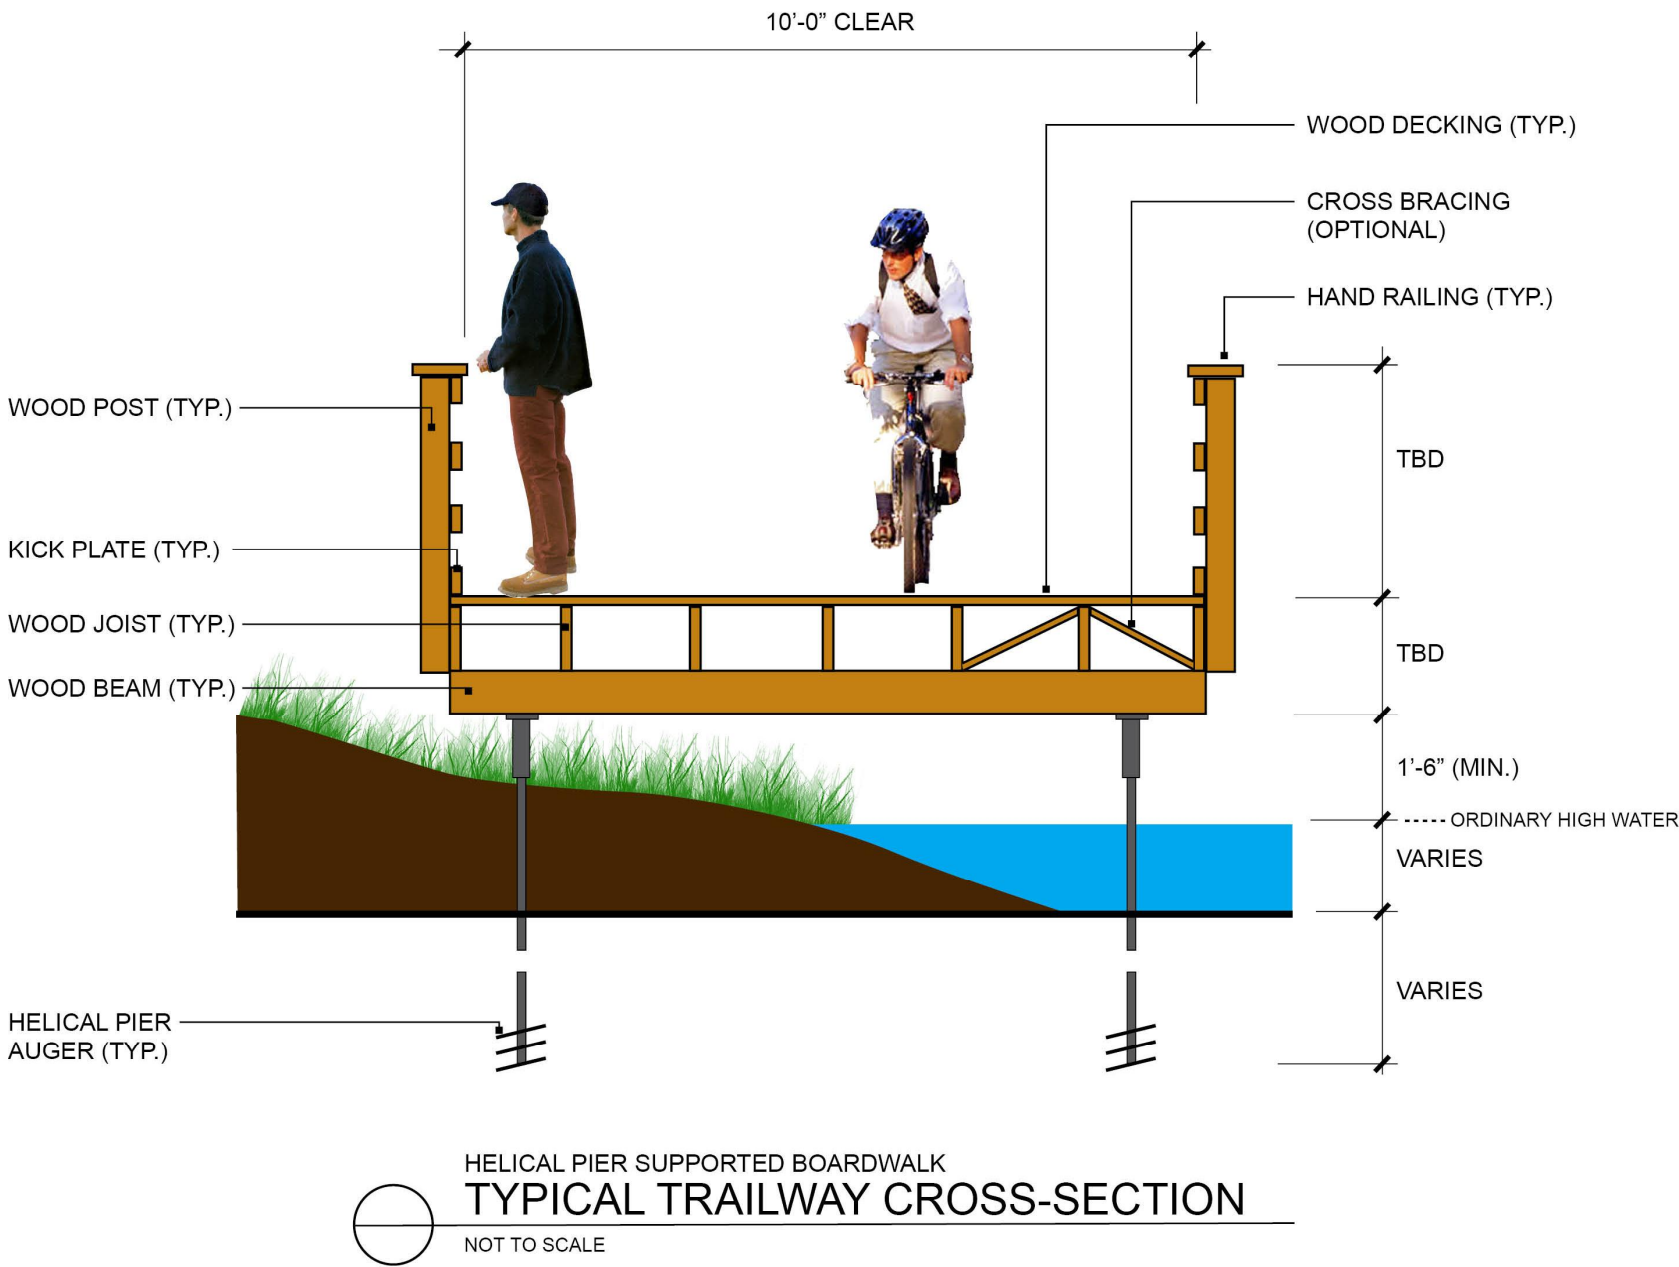


TRAIL TYPES & SURFACES

TYPICAL TRAIL CROSS-SECTIONS (Continued)

Clear-Span Bridge (CSB)
The proposed cross-section design for a clear-span bridge would be 10 feet wide. The typical cross-section design includes railings, decking, and structural members. It is anticipated that any new bridges constructed in the Boardman Lake Vicinity will be constructed similar to the existing pedestrian bridge on the north end of Boardman Lake. It is recommended that any bridge constructed along South Airport Road consider the existing site context, proximity to the edge of road in regards to snow removal, and viewsheds.

When developing the estimate of cost for linear foot of clear-span bridge the following scope items were considered: mobilization, removals, earthwork, all materials included in Typical Trailway Cross-Section, and restoration.

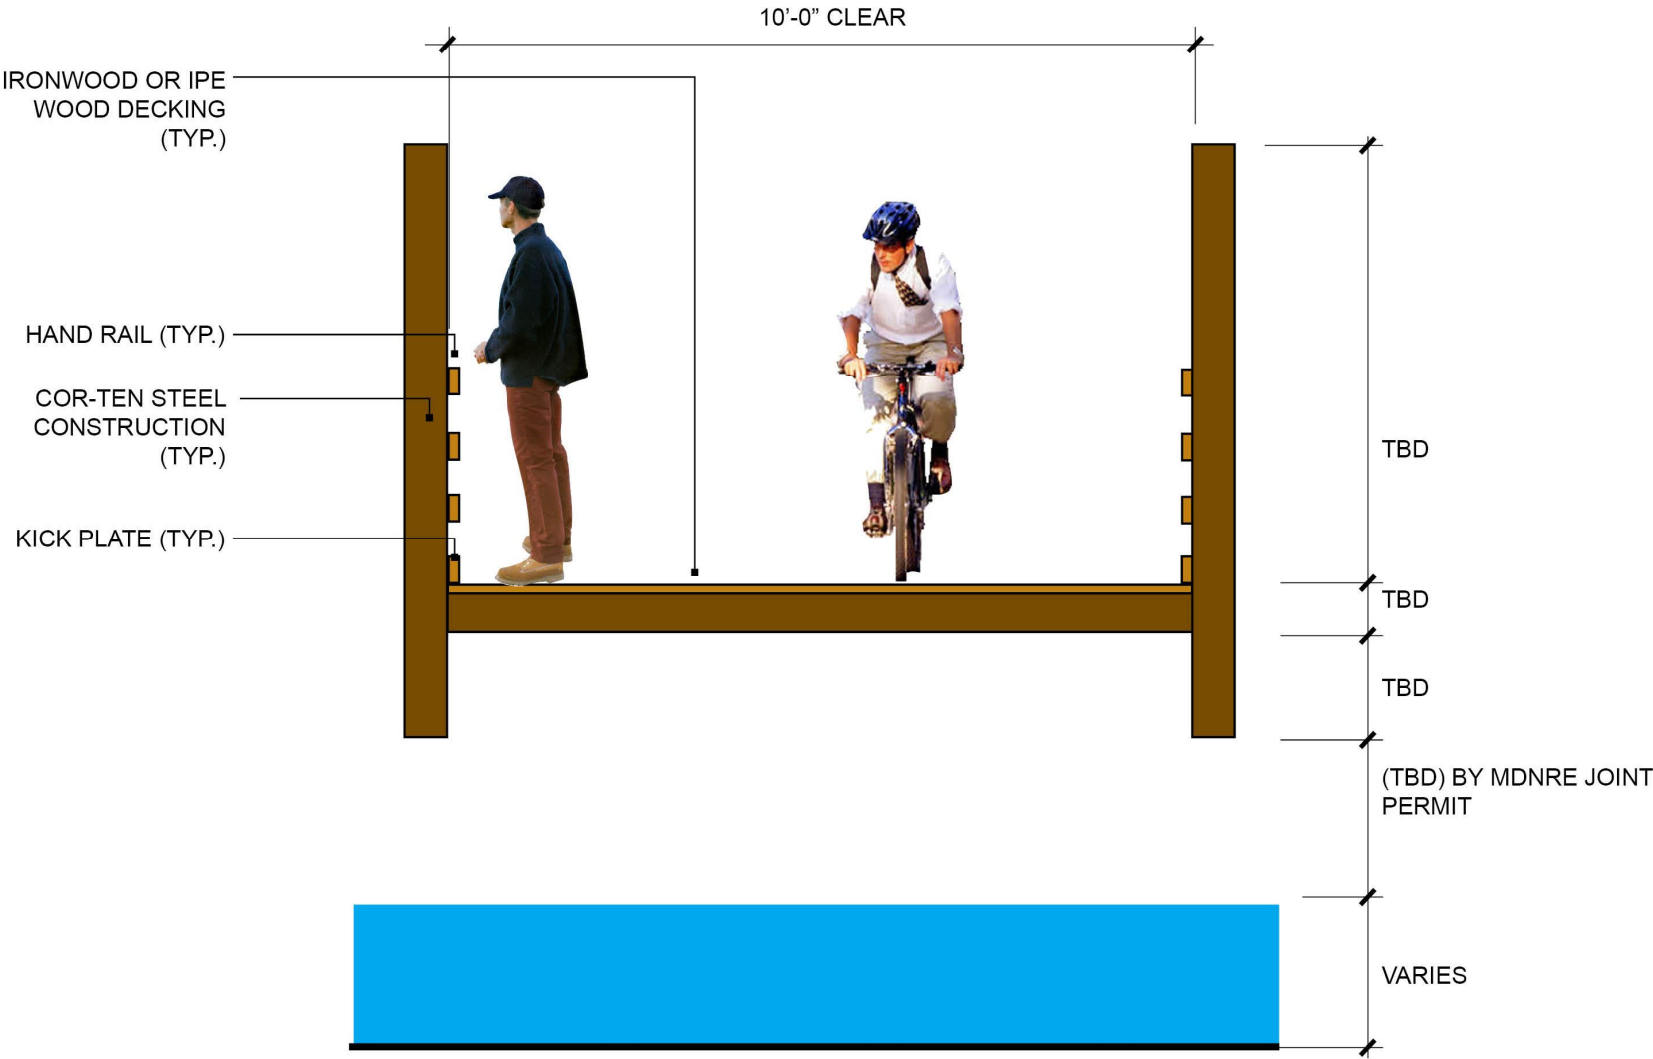

CLEAR-SPAN BRIDGE
TYPICAL TRAILWAY CROSS-SECTION
NOT TO SCALE

TRAIL TYPES & SURFACES

TYPICAL TRAIL CROSS-SECTIONS (Continued)

Typical Trailway Cross-section at Road/Driveway Crossing
The standard cross section is depicted to meet AASHTO standards. Alternative Trail routes A, B, B1 and C may necessitate similar configurations at one or more locations.

Detailed signage and crossing components and materials, pavement markings, mobilization, removals, and/or earthwork will be necessary as an alternative route is considered for implementation.

