


Figure 2 - Typical Public Port Plan / Launch Site

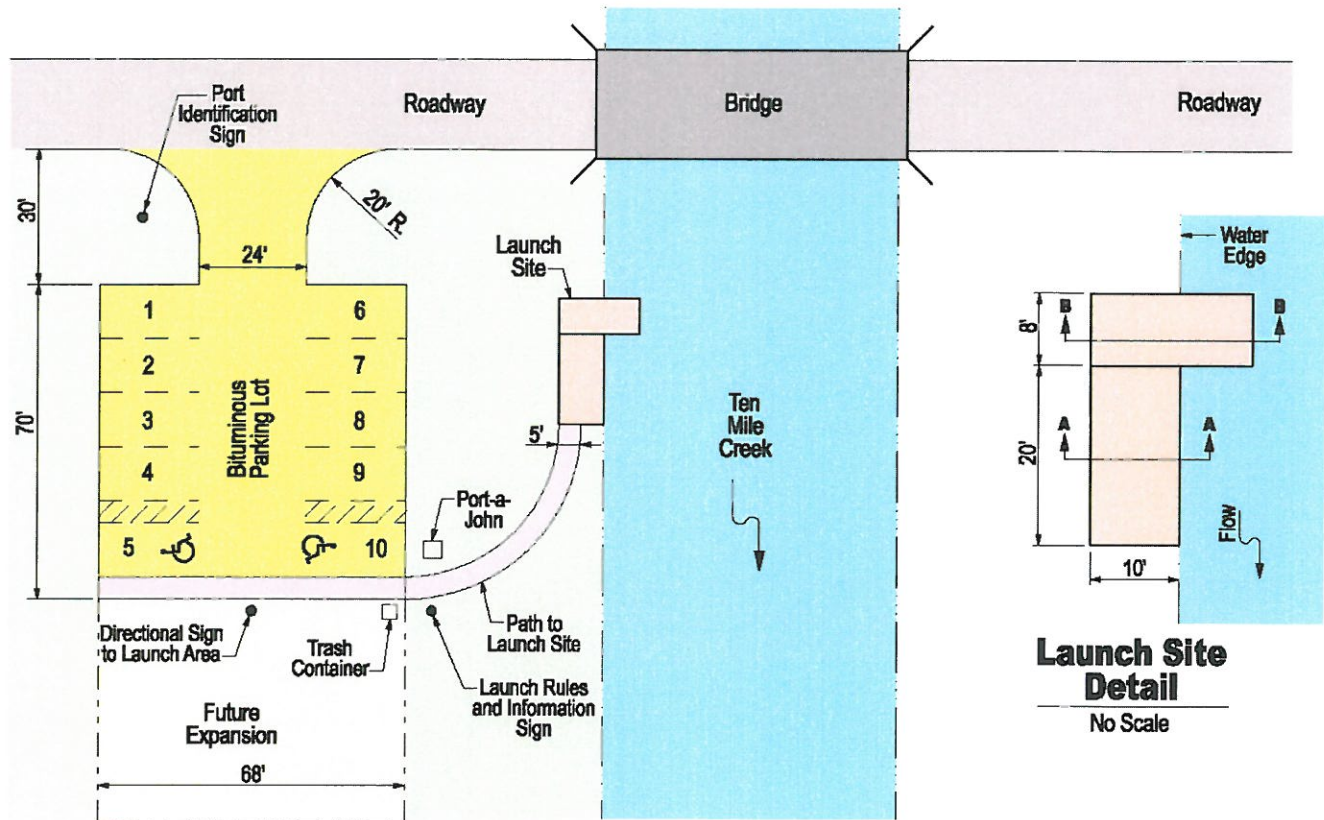

Typical Port Plan

No Scale

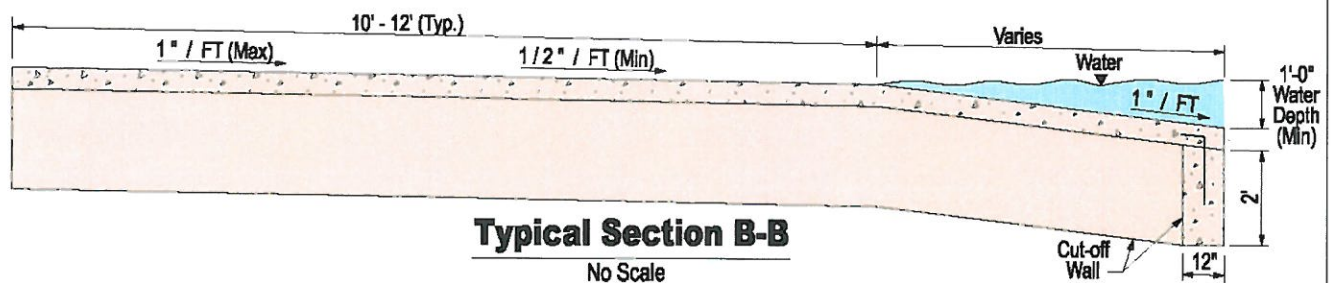
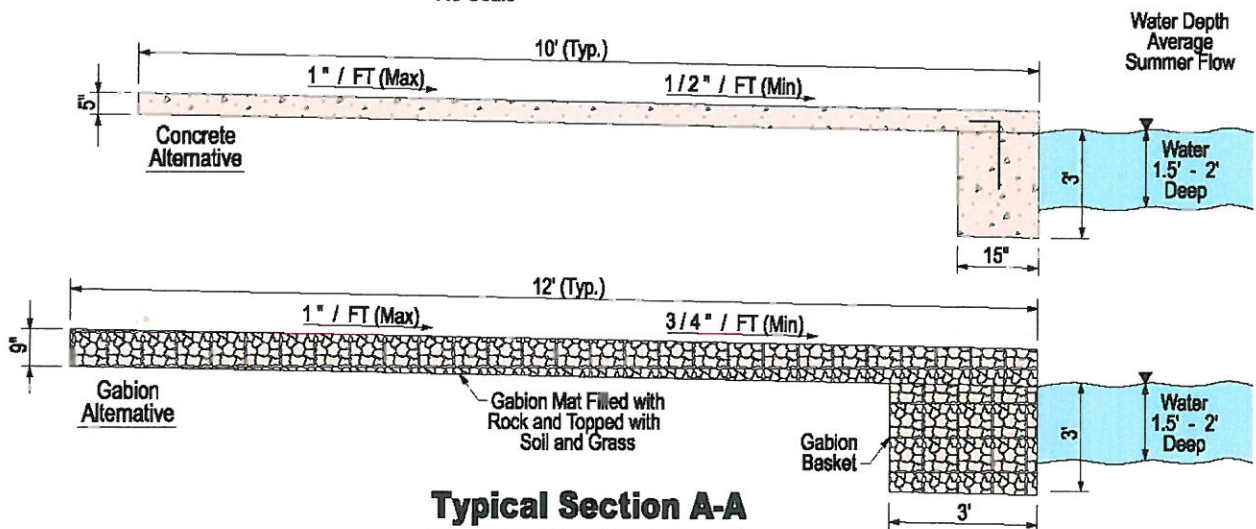


FIGURE 3
Budget Estimate for a Typical Port Site
(Refer to Figure 2)

1. Site Survey - L.S.	=	\$1,500
2. Site Design and Specs	=	\$4,000
3. Basic Permits DEP, HOP, Conser., PFBC, <u>No Federal Budgeted.</u> L.S.	=	\$4,000
4. Construction Stakeout L.S.	=	\$1,500
Subtotal Surveying and Engineering =		\$11,000
5. Clearing and Grubbing (topsoil)		
0.33 ac @ \$6,000/AC = 2000 use	=	\$2,000
6. Earthwork - 500 cy @ \$10.00/c.y.	=	\$5,000
7. Bituminous Paving		
1-1/2" TOP + 2" Binder + 4" BCBC		
7-1/2" x 120#/s.y./" = 900 #/s.y. = .45 ton/s.y.		
800 s.y. x .45 ton/s.y. = 360 ton @ \$50/ton	=	\$18,000
8. Geotextile - 800 s.y. @ \$4/s.y.	=	\$3,200
9. Concrete Launch - 20 c.y. @ \$600/c.y.	=	\$12,000
10. Appurtenances		
Line Painting - 126 l.f. x \$3/l.f. + 2 x \$250		
= 528 + 500 = 1028 - use	=	\$1,100
Port-a-John - L.S.		
Location sign - 10 s.f. = \$500+post	=	\$600
Directional sign + post - 5 s.f. \$300+post	=	\$400
	=	\$300
Topsoil, seeding, mulching, soil supplements		
1100 s.y. @ 4.00/s.y.	=	\$4,400
Subtotal Construction		\$47,000
TOTAL BUDGET ESTIMATE =		\$58,000